


FIAT DUCATO

2011 ->

Compatible with double DIN devices



Screw them using a magnetic screwdriver

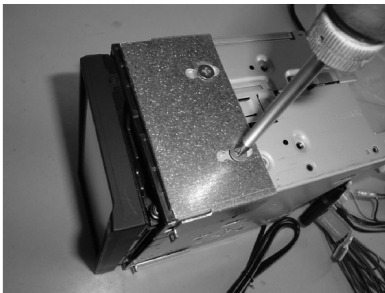


Screw the aftermarket car-radio to the remaining two brackets paying attention to fix it to the right holes of the brackets: tighten screws until the aluminium gets slightly deformed.

Connect all cables, mount the aftermarket car-radio + brackets to the brackets previously fitted inside the housing using the four screw supplied.



Fix the radio-frame.

This is the result after the installation.

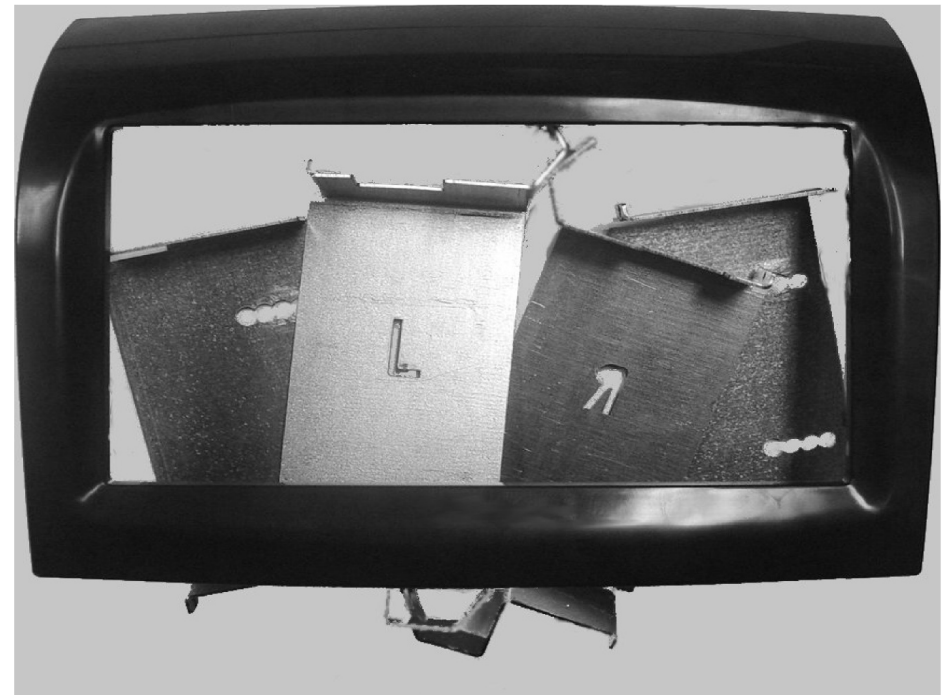

Double DIN Kit contents

Facia Plate
Mounting Brackets

Installation Manual Double DIN Kit




This is how the original dashboard looks like.




Remove the four screws as shown.



Remove the original plastic and/or the original car radio.

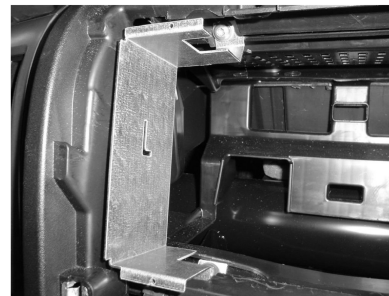

Put the mounting brackets inside the radio housing.

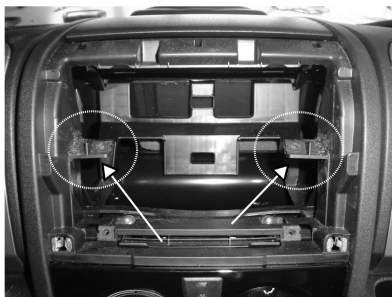

Cut and remove the plastic parts. Picture on the left shows which parts have to be cut.



These are the brackets mounted inside the radio housing. Pay attention to the letters on the brackets.

All installation work must be performed by a qualified professional installer only. The manufacturer / dealer is not liable for any kind of incidental or indirect damages.